


# Contour™ Arc

## Integrated LED Illuminated Mirror

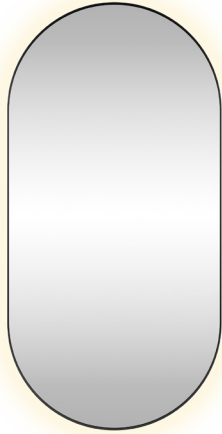

### Features

- Rounded corners for a classic and timeless finish
- Matte black steel frame can be mounted horizontally or vertically
- Back lighting evenly washes perimeter of mirror
- Copper-free backing prevents scratching and corrosion
- Line voltage or 0-10V dimming power supplies available

### Specification Guide

**Sample Part #: 694CP2448-30SO001**

Base Part # .....  
 Size .....  
 Color Temperature .....  
 Output/Frame Color .....

Base Part #	Size	Color Temp.	Output/Frame Color
694CP	2448 - 24"W x 48"L	30 - 3000K 35 - 3500K 40 - 4000K 00 - Unlit	SO001 - Black UL001 - Unlit Black

\*Power Supplies are ordered separately

### Product Details

Part #'s	694CP2448-KKSO001	690010.121 - 0-10V Dimming 690010.143 - Line Voltage
Dimensions	24"W x 48"H x 1.7"D	13"L x 1.25"W x 1.7"D
Frame	Steel	Aluminum
Lens	Glass	N/A
Wattage	35W	96W
Voltage	24V DC	120 - 277V AC
Current	2A	Max 4A
Lumens	2900LM @ 3500K	N/A
Color Temp.	3000K, 3500K or 4000K	N/A
Power Factor	N/A	0.94 @ 120V AC
Frequency	N/A	50 - 60Hz



#### Line Voltage Approved Dimmers

Leviton		Lutron	
VPI06-1LZ	DZ6HD	SCL-153PR	CTCL-153PDH
TTI06-1LZ	6674	DVCL-153PR	PD-6WCL
IPL06	6672	DVWCL-153PH	PD-5NE-WH

#### Notes:

1. Lumens per watt based on light source
2. Standard non-stock mirrors subject to 90 day lead time
3. Custom mirrors available upon request, subject to a 50 piece minimum, 50% deposit and 90 day lead time following approved drawings
4. Mirrors must be shipped LTL and cannot be shipped via FedEx or UPS
5. Warranty: 10-year frame and structure - 7-year glass, power supply and LEDs



3030 Corporate Grove Dr.  
 Hudsonville, MI 49426  
 Phone: 616.396.1355  
 itc-us.com



REV: 071624